



**Mark II Line Activity
Monitor Plug**



**Mark II Line Activity Monitor Plug
(LAMP-2)**

- **V.24/RS232, V.35, & X.21 Interfaces supported**
- **Non Interruptive monitoring**
- **Plugs available in Tan or Black**

Dynetcom's Mark II Line Activity Monitor Plug can be used to monitor interface line activity in any Mark II Patch or Switch modules that do not already have the interface monitoring feature incorporated. The LAMP-2 is self - powered from the interface leads, without distorting any data. It also does not disrupt the continuous thru data flow of the module when inserted into the any of the Mark II Patch or Switch Modules. The LAMP-2 is available in either tan or black.

LAMP-2 Interfaces Monitored

- | | |
|---------------------|----------------------------|
| • V.24/RS232 | TD, RD, RTS, CTS, and CD |
| • V.35 | RTS, CTS, DSR, CD, and DTR |
| • X.21 | T, R, C, I and S |

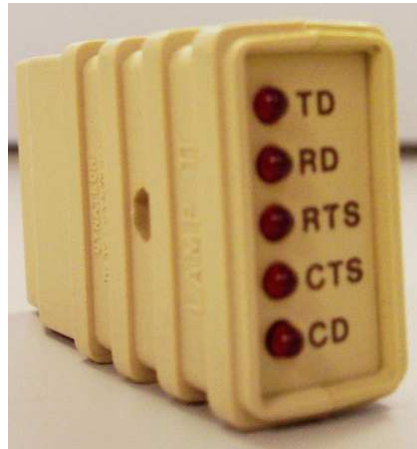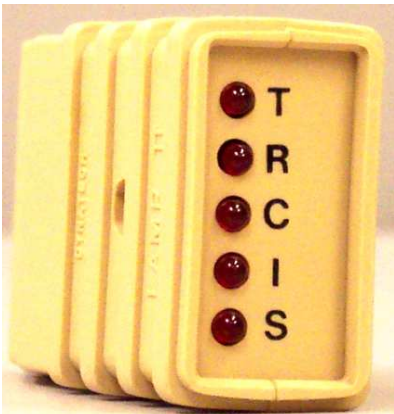

Communication solutions from
NSGDatacom

extend. evolve. innovate.



***Mark II Line Activity
Monitor Plug***

NSGDatacom

www.nsgdata.com

3863 Centerview Drive
Chantilly, VA, 20151-3232 USA
Phone: +(1) 703 793 2000
Fax: +(1) 703 793 2001

7435 New Technology Way
Frederick, MD, 21703 USA
Phone: +(1) 301 662 5926
Fax: +(1) 301 694 6279

The Brackens, London Road
Ascot, Berkshire SL5 8BE, UK
Phone: +(44) 1344 893 000
Fax: +(44) 1344 891 990